



PRO ARMOR





KAWASAKI TERYX 750 (K082032)

MID SKID PLATE SET

INSTALLATION INSTRUCTIONS

Please read these instructions carefully before installation to avoid injury to yourself or damage to your ATV.

PARTS LIST:


ITEM	DESCRIPTION	QTY
1	 FRONT MID SKID PLATE	1
2	 REAR MID SKID PLATE	1
3	HARDWARE KIT  CUP WASHER – QTY:12  M6 x 20mm flanged hex bolt – QTY:2	1

PREPARATION:

Remove the stock plastic skid from the vehicle along with its cup washers retaining the mounting bolts. Remove the stock steel mid skid plate from underneath the engine retaining the mounting bolts as well. If stock bolts spin in their mounts excessively, apply downward pressure to the stock skid plate while loosening the bolt.

INSTALLATION:

1. Position the Pro Armor rear mid skid plate in place aligning the mounting holes to the mounting points on the vehicle's frame. Install the supplied cup washers and retained factory mounting bolts at all of the mounting points except for the forward (2) mounting points.
2. Position the Pro Armor front mid skid plate in place aligning the mounting holes to the mounting points on the vehicles' frame. The rear (2) mounting points should be aligned to and overlap the forward (2) mounting points of the rear mid skid plate. Install the supplied cup washers and retained factory mounting bolts at all of the mounting points. For the (2) rear overlapping mounting points install the supplied cup washers along with (2) M6 x 20mm flanged hex bolts.
3. Tighten down the mounting bolts securing the front and rear mid skid plate to the frame of the vehicle.

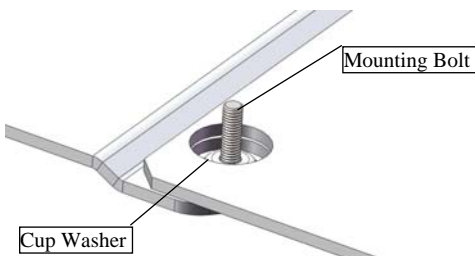

CUSTOMER SERVICE:

For further information, please contact PRO ARMOR at 1-951-343-9270.

K082032