



# INSTALLATION INSTRUCTIONS

## Applications :

- Yamaha Rhino
- Polaris RZR

# PRO ARMOR


## UTV Full Windshield

### ⚠ WARNING




Please read and understand instructions completely before assembly to avoid possible injury to yourself or others. Please retain these instructions for future reference.

Parts List: Prior to assembly confirm kit is complete, and prepare tools required for installation - Phillips screw driver and 7/16" wrench (or preferred power wrench).

Item #	Description	Qty
1	Full size Windshield	1
2	Fitting Instruction	1
3	Rubber Coated "C" Clamps	6
4	1/4" 20 X 1-1/4" Phillips Pan head screws	6
5	Washers	6
6	1/4" Nylock Nut	6

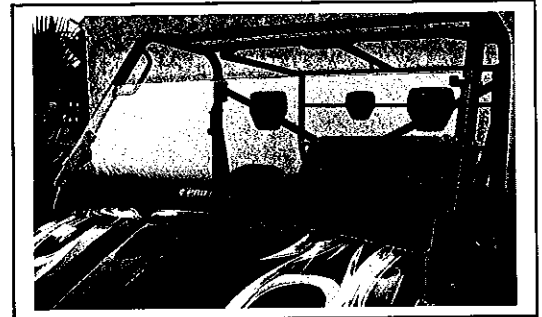

## INSTALLATION

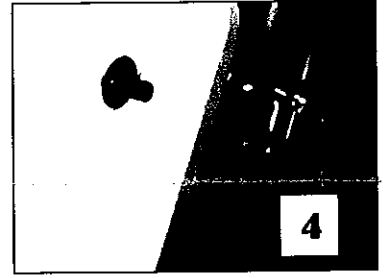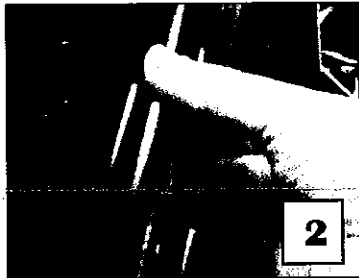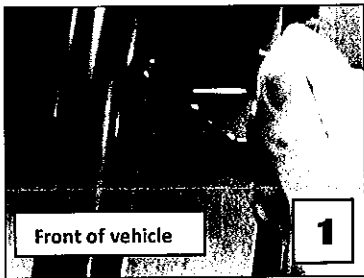

**Step 1.** Clean vehicle, ensuring Cab Frame Tubing is free of all dirt, then park vehicle in shaded level area.

**Step 2.** Install Clamps – Refer to illustration (1 & 2). Place 3 x clamps on one side of the vehicle over the tubing being sure that the flat surface of the clamp is rolled over the front of the tubing, facing the front of the vehicle - illustration (1).

**Step 3.** Repeat Step 2 to the other side.

**Step 4.** Sit the screen over the clamps and loosely apply the Screws and nuts to the bottom clamps either side of the screen. Repeat this process with the remaining 4 nuts and bolts. Refer to illustration (3 & 4).

**Step 5.** Ensure the screen is properly aligned to the bottom vehicle contour as a guide. It should be centered over the matching dash contour when ready for tightening of hardware.

**Step 6.** Adjust shield position with clamp placement to ensure desired fit then tighten all screws, starting from the bottom. Warning: If using a power wrench, please use cautiously to avoid injury.

## MAINTENANCE

Regularly check that all clamps are secured adequately. Retighten screws as necessary.

## CLEANING

Rinse off screen with light water pressure. Use mild soapy water with soft terry cloth to wash windshield. Most fine scratches may be able to be cleaned or removed with Plexus® or Novus II® polish.

