




# PRO ARMOR

## POLARIS RAZR 4 (P101208) DOOR SKINS INSTALLATION INSTRUCTIONS

Please read these instructions carefully before installation to prevent injury to yourself or damage to your vehicle.

### PARTS LIST:

PART	DESCRIPTION	QTY
1	FRONT LEFT DOOR SKIN	1
2	FRONT RIGHT DOOR SKIN	1
3	REAR LEFT DOOR SKIN	1
4	REAR RIGHT DOOR SKIN	1


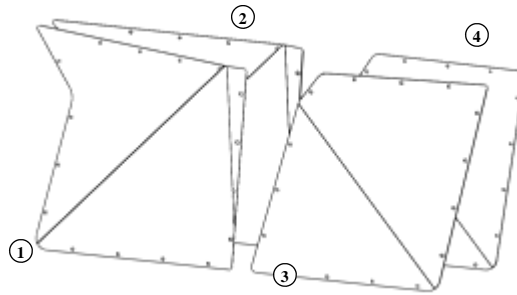


### PREPARATION:

1. P101208 Door Skins are to be installed with the P101202 Side door application. Please make sure that the side doors are properly installed on the vehicle. Locate the mounting hardware for the door skins from the P101202 hardware kit. The hardware should consist of (62) M6 x 16mm button head bolts (62) 6mm washers and (62) M6 nyloc flanged nuts.

### INSTALLATION:

1. Position the front left door skin over the swinging door section of the front left side door. Align the mounting holes of the door skin to the mounting tabs located on the door. Loosely install (1) M6 x 16mm button head bolt, (1) 6mm washer and (1) M6 nyloc flanged nut at each of the mounting points (16) total.
2. Position the rear left door skin over the swinging door section of the rear left side door. Align the mounting holes of the door skin to the mounting tabs located on the door. Loosely install (1) M6 x 16mm button head bolt, (1) 6mm washer and (1) M6 nyloc flanged nut at each of the mounting points (15) total.
3. With all mounting points located and hardware loosely installed, tighten the mounting bolts securing the door skins to the front and rear left side doors see Fig. 1 and 2. Repeat the procedure for the right side doors with the front and rear right door skins.

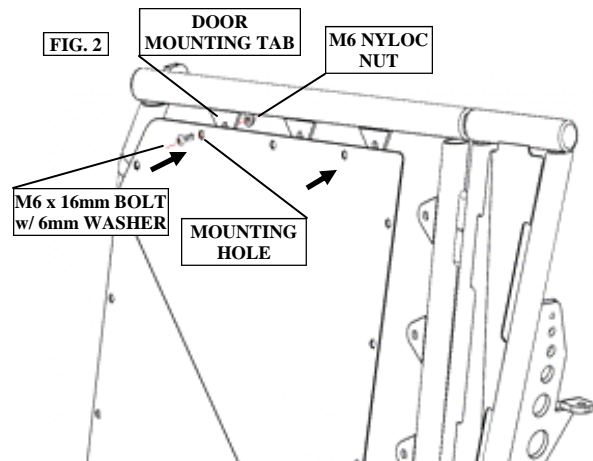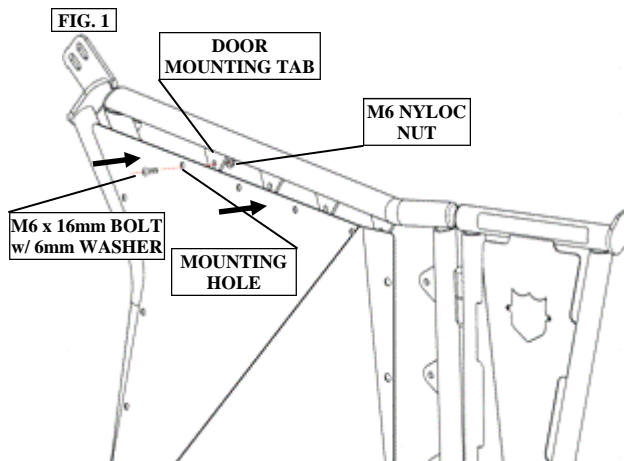

### MAINTENANCE:

Periodically check to see that the doors skins are properly installed. Re-torque mounting bolts when necessary. **Do not operate the vehicle if any bolts or fasteners are loose or missing from the doors. Do not operate the vehicle with doors open!**

### CUSTOMER SERVICE:

For further information, please contact Pro Armor at 1-951-343-9270.

**P101208**